


ANGLE GLOBE VALVE DN15 to DN200 - Type 700 manual -

Description

- **Size** : DN15 to DN200.
- **Connection** : Screwed-on flanges (PN10/PN16 - PN20, 300Lbs and 600Lbs) or welded flanges, SW, BW, threaded female.
- **Packing material** : PTFE, **25% glass PTFE rafter**, graphite ring, O-ring stuffing box (with or without bellow(s)).
- **Body seal material** : **25% glass PTFE**, graphite, spiral stainless steel/graphite.
- **Contact** : **Metal/metal**, hard faced, metal/PTFE.
- **Wetted material** : **1.4404 (316L)**, 1.4306 (304L), steel, nickel alloy (inconel, hastelloy, monel, nickel...), 904L (UB6), 1.4571 (316Ti), titanium, tantalum, refractory (310).
- **Options** : Pneumatic motor operation (single or double acting) or electrical, manual override, position indicator, mechanical limit switch, raised head (high temperature), nitrogen insufflation / leakage detector in the stuffing box.

Note : bold, standard parameters.

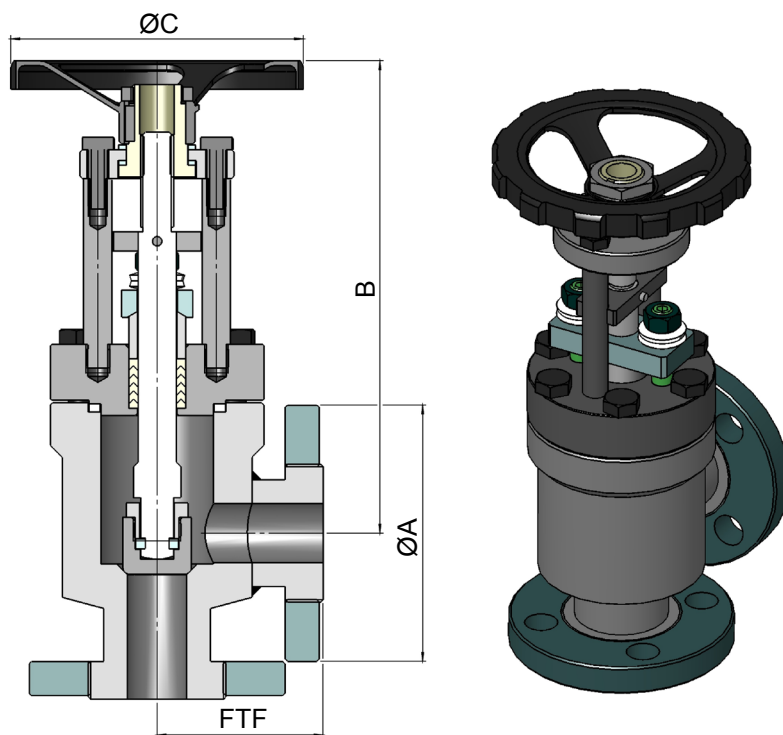


Dimension		DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN150	DN200
A	PN10/16	95	105	115	-	150	165	-	200	220	285	340
	PN20	89	99	108	-	127	152	-	190	229	279	343
	300Lbs	95	117	124	-	156	165	-	210	254	279	318
FTF	PN10/16	90	95	100	-	115	125	-	155	175	225	275
	PN20	57	64	70	-	83	102	-	121	146	203	248
	300Lbs	76	89	102	-	114	133	-	159	178	222	279
B		120	130	140	-	220	240	-	310	460	520	630
C		125	125	125	-	175	175	-	250	250	500	500

All other manufacturing are available on request

Non-contractual document

ANGLE GLOBE VALVE DN15 to DN200
- Type 700 manual -

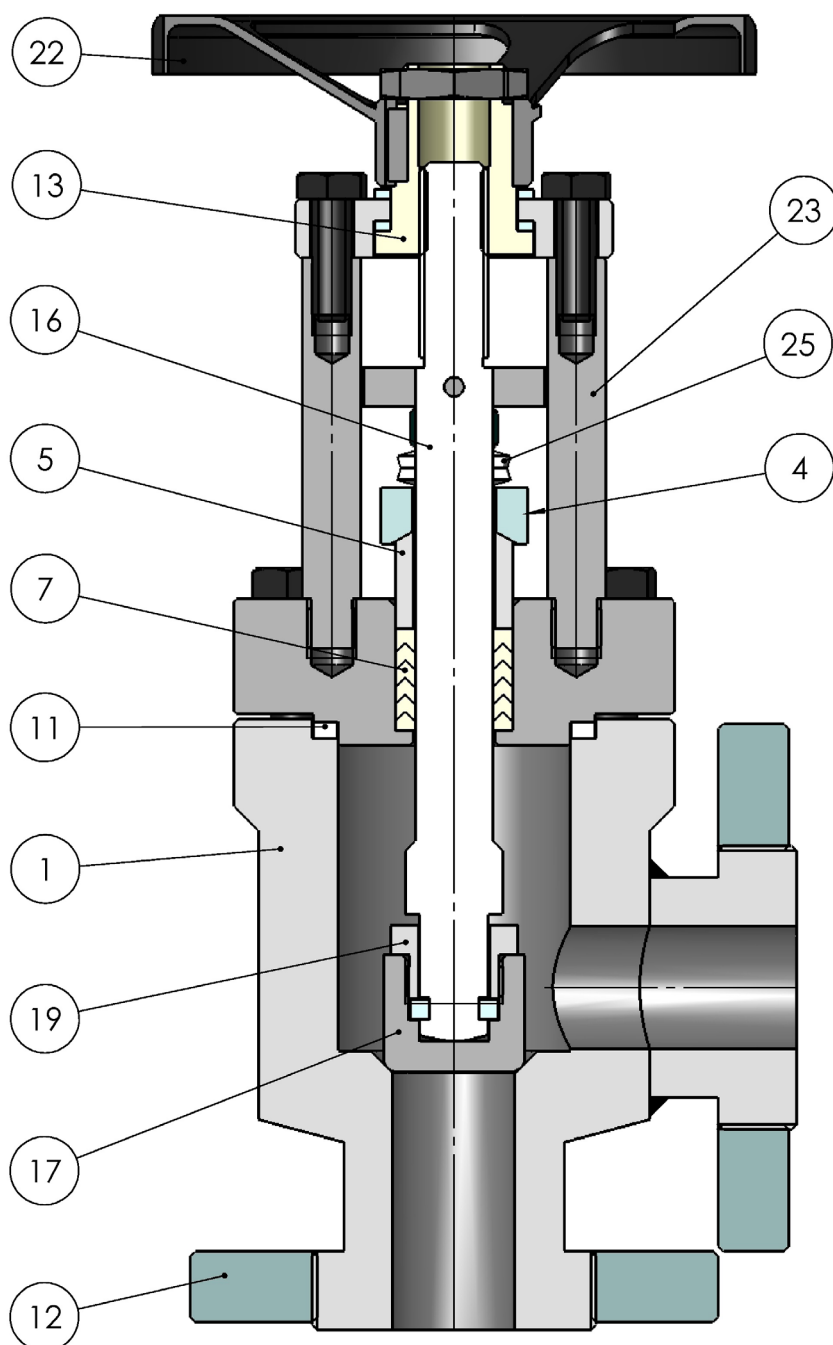

Rep.	Description	Qty
1	Body	1
2	Bonnet	1
4	Gland flange	1
5	Gland	1
11	Gasket	1
7	Packing	1
12	Screwed-on flange	2
13	Yoke sleeve	1
16	Stem	1
17	Seat	1
19	Valve nut	1
22	Wheel	1
23	Column	2
25	Spring washer	4

Find out more about our globe valves:

<http://www.bom.fr/en/globe-valve>



All other manufacturing are available on request